

Eagle PERC

280-300 Watt

MONO CRYSTALLINE MODULE

Positive power tolerance of 0 ~+3%



PERC

(4BB)



KEY FEATURES



4 Busbar Solar Cell:

4 busbar solar cell adopts new technology to improve the efficiency of modules, offers a better aesthetic appearance, making it perfect for rooftop installation.



High Efficiency:

Higher module conversion efficiency (up to 18.33%) benefit from Passivated Emitter Rear Contact (PERC) technology.



Anti-PID Guarantee:

Limited power degradation of Eagle module caused by PID effect is guaranteed under 60 C /85% RH condition for mass production.



Low-light Performance:

Advanced glass and solar cell surface texturing allow for excellent performance in low-light environments.



Severe Weather Resilience:

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



Durability against extreme environmental conditions:


High salt mist and ammonia resistance certified by TUV NORD.




LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty • 25 Year Linear Power Warranty

- ISO9001:2008 Quality Standards
- ISO14001:2004 Environmental Standards
- OHSAS18001 Occupational Health & Safety Standards

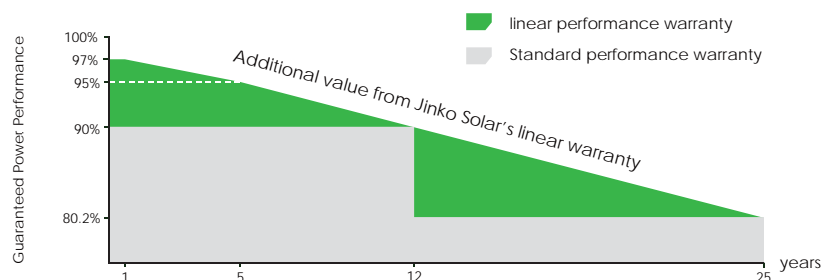

Engineering Drawings

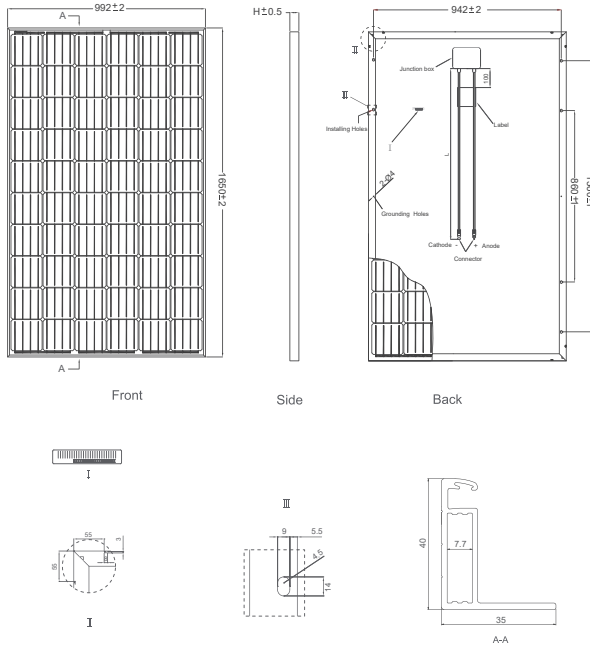


Packaging Configurations

(Two boxes =One pallet)

25pcs/ box , 50pcs/pallet, 700 pcs/40'HQ Container

Electrical Performance & Temperature Dependence

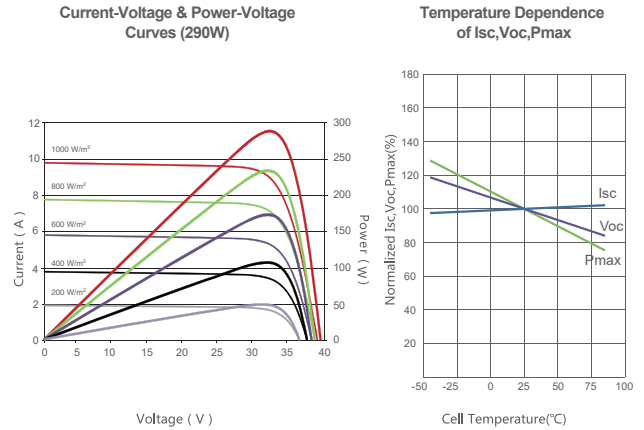

Mechanical Characteristics

Cell Type	Mono-crystalline PERC 156×156mm (6 inch)
No. of cells	60 (6×10)
Dimensions	1650×992×40mm (64.97×39.06×1.57 inch)
Weight	19.0 kg (41.9 lbs.)
Front Glass	3.2mm, High Transmission, Low Iron, AR Coating Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	12 AWG, Length:900mm (35.43 inch)
Fire Type	Type 1

SPECIFICATIONS

Module Type	JKM280M		JKM285M		JKM290M		JKM295M		JKM300M	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	280Wp	209Wp	285Wp	212Wp	290Wp	216Wp	295Wp	220Wp	300Wp	224Wp
Maximum Power Voltage (Vmp)	31.8V	29.8V	32.0V	30.0V	32.2V	30.2V	32.4V	30.4V	32.6V	30.6V
Maximum Power Current (Imp)	8.81A	7.01A	8.91A	7.07A	9.02A	7.15A	9.11A	7.24A	9.21A	7.32A
Open-circuit Voltage (Voc)	39.0V	36.2V	39.3V	36.4V	39.5V	36.6V	39.7V	36.8V	40.1V	37.0V
Short-circuit Current (Isc)	9.43A	7.62A	9.50A	7.72A	9.55A	7.81A	9.61A	7.89A	9.72A	8.01A
Module Efficiency STC (%)	17.11%		17.41%		17.72%		18.02%		18.33%	
Operating Temperature(°C)	-40°C~+85°C									
Maximum system voltage	1000VDC(UL)									
Maximum series fuse rating	15A									
Power tolerance	0~+3%									
Temperature coefficients of Pmax	-0.39%/°C									
Temperature coefficients of Voc	-0.29%/°C									
Temperature coefficients of Isc	0.05%/°C									
Nominal operating cell temperature (NOCT)	45±2°C									

STC: Irradiance 1000W/m²

Cell Temperature 25°C

AM=1.5

NOCT: Irradiance 800W/m²

Ambient Temperature 20°C

AM=1.5

Wind Speed 1m/s

* Power measurement tolerance: ± 3%

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

© Jinko Solar Co., Ltd. All rights reserved specifications included in this datasheet are subject to change without notice.
US-MKT-300M_v1.0_rev2016